

# WINTER 2000 AIR VENT HEADS



**ClassNK**




## DESCRIPTION AND APPLICATION:

These vent heads are produced with seawater resistant aluminium DIN 1725; they are lightweight, non corroding and request absolutely no maintenance. WIN 2000 type 1 is ideal for general purpose usage, whereas WIN 2000 type 1B is an anti-splash water type recommended for fuel tanks.

## OPTIONS:

- Ballast water management execution
- Special size counter flange and gasket
- Closing device
- Spark arrester
- Insect screen
- Screw on thread execution (only for aluminium pipes – for steel pipes use flange connection)
- Powder coating
- Several materials
- Sounding pipes

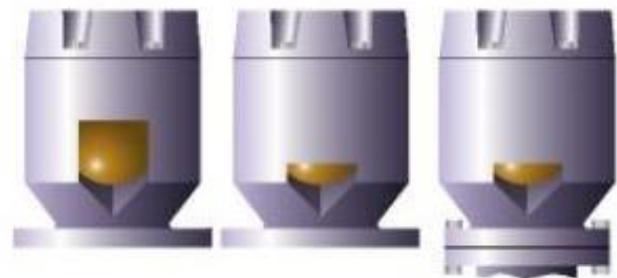

Type 1

Type 1-B

"Small Flange"  
Connection

## SPECIFICATIONS AND DIMENSIONS:

			ND50	ND65	ND80	ND100	ND125	ND150	ND175	ND200	ND250	ND450
			2"	2 1/2"	3"	4"	5"	6"	7"	8"	10"	18"
<b>A</b>		mm	106	130	160	195	235	275	275	340	415	Ø740
<b>B</b>	±2.5	mm	161	195	226	265	313	372	372	470	585	1110
<b>C</b>		mm	136	165	190	223	260	305	305	377	464	925
<b>D</b>		Flange connections according to international standards										
		kg	2	2.75	3.75	6	8.5	12	13	19.5	31	134
		Maximum inlet air speed 4 m/s										

To order please contact:



Rua João da Cruz Viegas, 149D  
2750-382 CASCAIS • PORTUGAL

Tel: +351 211 920 980 • Fax: 211 957 905  
Mob: +351 915 424 111 • NIF: 508 397 243  
E-mail: [tormarine@tormarine.pt](mailto:tormarine@tormarine.pt)

